


DESCRIPTION

**ClimbTech 5,000-lbf / 22kN Beam Anchor.**

A removable and reusable sliding I-beam anchor, easy to place and remove. This anchor is designed to easily glide along the beam while trailing the worker. The Beamer is adjustable in width from 3.5"-14" with a minimum flange thickness of .25".



**ACCEPTABLE INSTALLATION ORIENTATIONS**

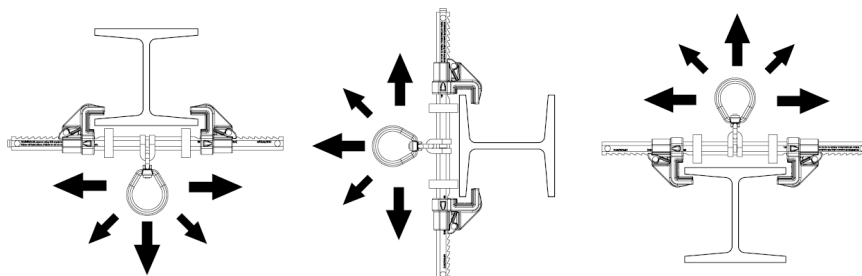

SPECIFICATIONS

- ▼ **UTS**  
5,000-lbf / 22kN
- ▼ **Max User Weight**  
310-lbs / 140kg
- ▼ **Working Load**  
1000-lbs / 454kg

MATERIALS

- ▼ **Clamps**  
Bronze
- ▼ **Support Bar**  
Aluminum
- ▼ **Swivel**  
Zinc Plated Steel
- ▼ **Swivel Mount**  
Stainless Steel
- ▼ **Rollers**  
Nylon

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	LOADING	WEIGHT
BWA014K	I & H Beams	5,000-lbf (22kN)	1578g