



DESCRIPTION

**ClimbTech 5,000-lbf / 22kN Removable Bolt Anchor.**


A removable and reusable anchor designed to work in 20mm (3/4") drilled hole in concrete substrates.

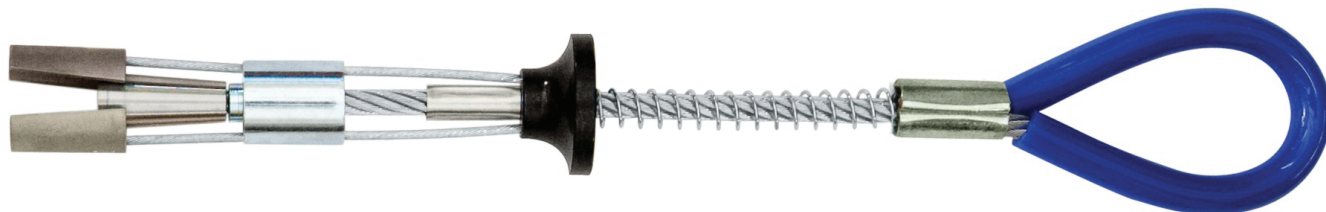

RAF075N

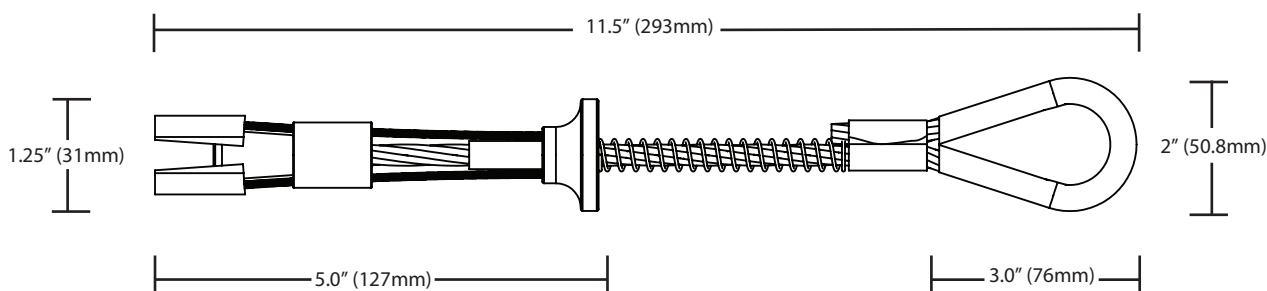

HOLE DRILLING REQUIRMENT CHART	
(A) Minimum distance from edge/corner	(B) Concrete thickness
6" (15.3 cm)	12" (30.5 cm)
12" (30.5 cm)	5" (12.7 cm)

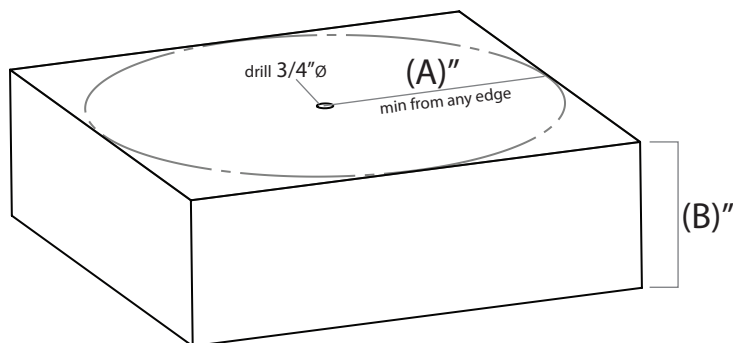

SPECIFICATIONS

- ▼ **UTS**  
5,000-lbf / 22kN
- ▼ **Max User Weight**  
310-lbs / 140kg
- ▼ **Working Load**  
1000-lbs / 454kg

MATERIALS

- ▼ **Spoons**  
Stainless Steel
- ▼ **Swage**  
Zinc Plated Copper
- ▼ **Cone**  
Stainless Steel
- ▼ **Anchor Loop**  
Polyurethane
- ▼ **Cleaning Bushing**  
Zinc Plated Steel
- ▼ **Spring**  
Zinc Plated Steel
- ▼ **Stop Sleeve**  
Stainless Steel
- ▼ **Trigger**  
Aluminum
- ▼ **Main Cable**  
Aircraft Cable
- ▼ **Return Wire**  
Aircraft Cable

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	WEIGHT
RAF075N	Concrete	Blue	5,000-lbf (22kN)	200g
RAM075N	Multi-Use	Silver	5,000-lbf (22kN)	226g